


# ***FORT2GOLD***

## ***Hitch lock***

### ***Instructions***



## Components

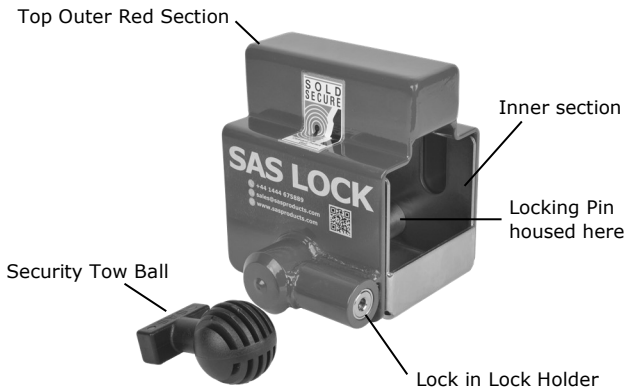

## Maintenance

On a regular basis for optimum performance:

- Clean and lubricate moving parts. We recommend using SAS Mint General Protectant Spray to lubricate the locks of all our products.
- If the hitch lock is going to be fitted for a longer period, a small amount of grease should be put on the lock before inserting into the housing.



## Spare Parts

Replacement Parts can be ordered at your local SAS dealer, or online at [www.sasproducts.com](http://www.sasproducts.com)

## **SAS FORT2GOLD Hitch Lock Instructions**

1. Fit the security tow ball in the hitch head. Now, taking the Hitch lock, insert the key into the lock, and rotate until you cannot turn the key any further, and pull to remove the lock.
2. KEEPING ONE HAND UNDERNEATH the hitch lock (or by placing the hitch lock on a firm surface), remove the locking pin, by pulling out the extended round plated bar, found on the opposite side to the lock holder.
3. The plated inner section of the hitch lock will now separate from the top red section.
4. Fit the top red section to your hitch handle – ensure the rear open end of your hitch handle is engaged in the securing compartment found inside at the top of the hitch lock.
5. Now bring the plated inner section up from underneath, and marrying up the locking bar holes – you can then re-fit the locking bar. It is advisable to pull the rubber gaiter back towards the caravan so that it is clear of the hitch lock, rather than fitting the hitch lock over it
6. The locking bar needs to fit snugly – with about 20mm protruding. If you have difficulty, then gently shake the fitted hitch lock – the locking bar will then seat perfectly.
7. Re-fit the lock, ensure that the lock face is flush with the lock holder, (you may need to turn the lock with the key in a clockwise direction until the lock seats flush) and then turn the key anticlockwise to lock, and remove the key.

### **IMPORTANT**

1. Never move or drive vehicle with the hitch lock fitted.
2. It is imperative that the hitch lock is fitted for effective protection.

## About SAS

We understand the life of towing and what is important to you.

A caravan or a motorhome is more than a box on wheels – it is a home, a store of happy memories and a lifestyle. A trailer is more than just a transport device – it is still the most flexible means available to transport bulky items from A to B by yourself. We know the importance of the experiences you build in your caravan or the days you spend with your trailer behind you.

Unfortunately however, in today's world, crime and theft continue to increase. Over 4000 caravans are stolen in the UK each year\*, and less than 3% are ever fully recovered\*\*.

Our vision is to bring a stop to caravan and trailer theft with quality, reliable security solutions that deter criminals and prevent crime. We are on a mission to preserve your assets and memories and give you peace of mind.

**Nothing speaks of quality, reliability and peace of mind quite like a SAS HITCHLOCK.**

In over 30 years of speaking to owners of trailers and caravans, we have developed our solutions to fit your needs, and we are proud of the confidence placed in us by owners, insurers, quality controllers and our distribution network alike.

**Visit the SAS website today to find others ways to SECURE YOUR WORLD.**

\* According to AA Caravan Insurance



**SAS Security Products Ltd**

+44 1444 675889

[sales@sasproducts.com](mailto:sales@sasproducts.com)

[www.sasproducts.com](http://www.sasproducts.com)

